

Ampacoll® Fenax 40/60

Vapour edge tape



external
internal

- > Can be plastered over (plaster base)
- > Fully adhesive on one side
- > Extremely adhesive
- > Slitted liner with finger lift (40 mm / 60 mm)
- > No primer required on dry surfaces
- > For indoor and outdoor use
- > Can be left exposed to the weather for 12 months


Technical details		Value	Standard
Amount of adhesive to be applied		300g/m ²	
Application temperature		-5°C to +40°C	
Resistance to temperature		-40°C to +100°C	
UV stability		12 months (Central Europe)	
Tear resistance	lengthwise	220N/5 cm	EN 12311-2 / A
	cross	280N/5 cm	
Elongation at break	lengthwise	140%	EN 12311-2 / A
	cross	100%	



 **ISO 9001**
Swiss Research

Area of application: Professional integration of vapour checks or wood-based materials in unplastered brickwork or concrete. The airtight layer is created with by plastering over the tape.

Delivery forms			
Item no.	Identification	Roll size	Box contents
7640115536921	Ampacoll® Fenax 40/60 Vapour edge tape	100 mm × 25 m	4 rolls = 100 metres

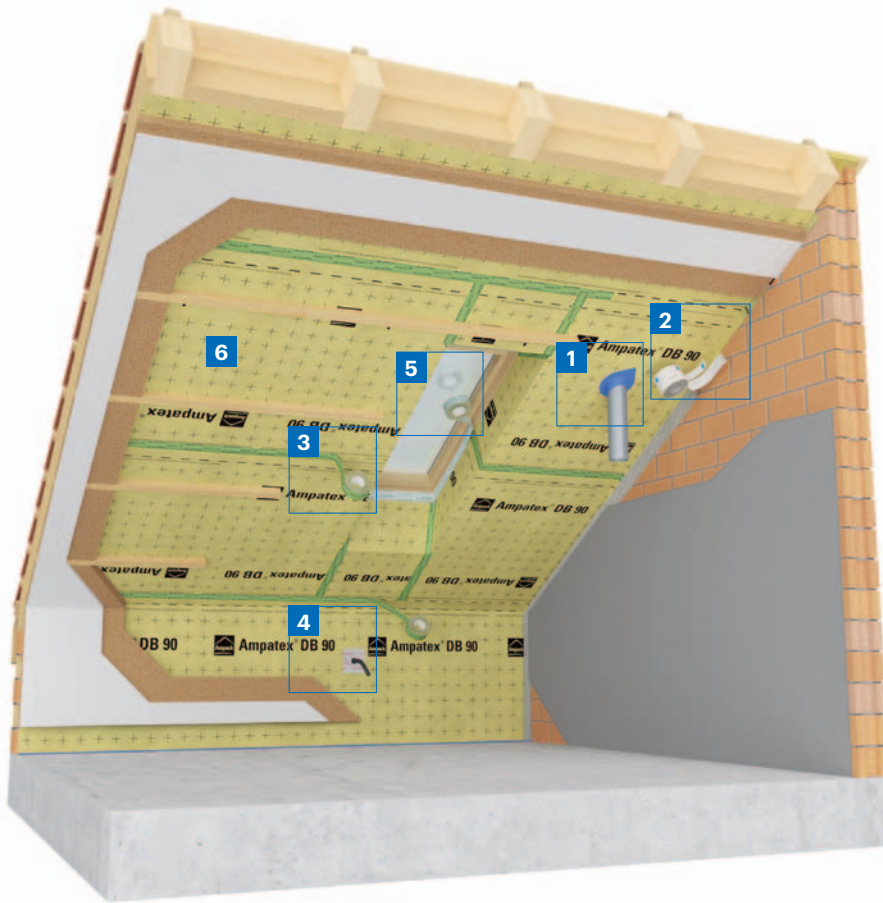

6 Ampatex® DB 90
vapour check
and airtight layer



Application photos



Please observe the recommenda-
tions for use and further system
products in our adhesives matrix



Further information and
detailed documentation at
www.ampack.biz

Sales via specialist dealers

Ampack Switzerland: 071 858 38 00
Ampack Austria: 05523 53433
Ampack Germany: 07621 1610264
Ampack France: 04 50 83 70 54
Ampack Italy: 0471 053 475

www.ampack.biz



The following information could have been superseded by new findings or developments.
Current Information can be found at www.ampack.biz. © Ampack AG, Rorschach, 05.2018

5001EU/EXX.YHW(VS)0418