

Ampacoll® Flexx pro

Flexible acrylic adhesive tape



- > Optimum crosswise flexibility
- > Maximum adhesive power at temperatures from as low as -5°C
- > Serrated - easy to tear off by hand
- > Soft and adaptable; absorbs component movements

Technical details	Value
Storage	cool and dry
Working temperature	from -5°C
Temperature resistance	-40 to $+100^{\circ}\text{C}$
Ageing resistance	>20 years (under covering)
Natural weathering period	4 months (without mechanical stress)

Area of application: Tear-resistant but at the same time flexible system adhesive tape for indoor and outdoor use.
60mm: Ideal for airtight and windproof sealing of overlaps, board joints and penetrations.
100mm/150mm: Ideal for airtight and windtight lining of component joints and masking boards on ridges, hips and grooves. Slit liner.




 **ISO 9001**
Swiss Research

* Conditions for the twenty-year premium warranty include registering the building object and the Ampack products used. In addition, our products must be used as part of a system. For further details, please see our General Warranty Conditions.

Forms of delivery			
Article number	Description	Roll dimensions	Box contents
7640442090998	Ampacoll® Flexx pro 60	40 m × 60 mm	10 rolls = 400 m
7640442090622	Ampacoll® Flexx pro 100	25 m × 100 mm	6 rolls = 150 m
7640442090653	Ampacoll® Flexx pro 150	25 m × 150 mm	4 rolls = 100 m

Application photos

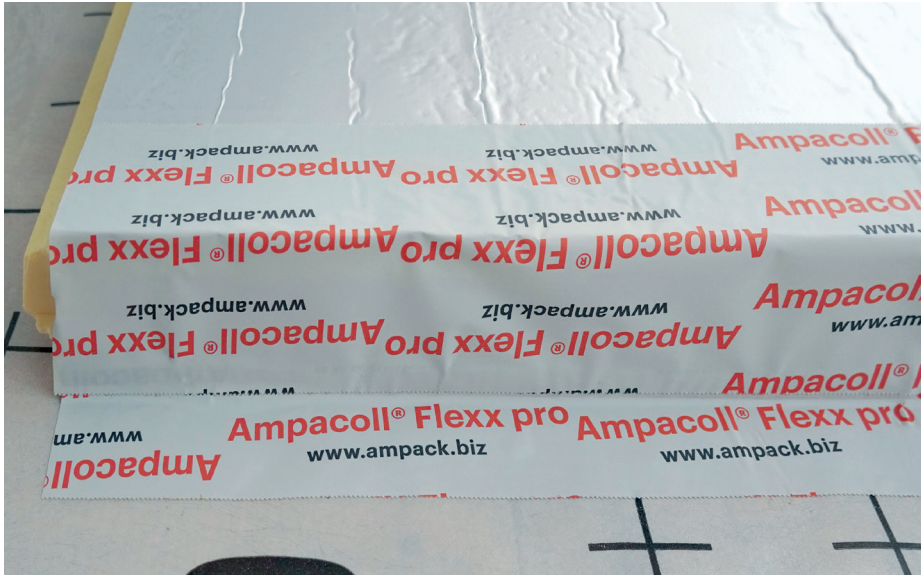

Tips for laying

The surfaces to be bonded must be clean, dry and free of dust and grease. The ambient temperature, the surface temperature and the temperature of the adhesive tape must correspond to the indicated processing temperature. Installed membranes should be stress-free and even. The adhesive tape must be applied stress-free following the uneven surface of the substrate and pressed on firmly.

Ampacoll® Flexx pro adheres immediately to the substrate and is largely insensitive to normal weather conditions for four months. Mechanical loads caused by objects being dragged around, intensive walking or similar must be avoided.



Note the application guidelines and other system products in our adhesive matrix



For more detailed information and documents see www.ampack.biz

Sales via specialist dealers

The following information may have been superseded by new findings or developments. Current Information can be found at www.ampack.biz. © Ampack AG, Rorschach, 08.2023

5553EU/EX.YY(AR)0823

Ampack Switzerland: +41 71 858 38 00
Ampack Austria: +43 5523 53433
Ampack Germany: +49 7621 1610264
Ampack France: +33 4 50 83 70 54
Ampack Italy: +39 471 053 475
Ampack Ireland: +353 91 394 467
www.ampack.biz

