

# Ampacoll® ND Pads

Nail seals for roofs and formwork strips



external

- Better adhesion than many customary nail sealing products
- Closed-cell foam, PVC-free
- Optimum width – fits all counter battens
- HFA leak detection tests (Holzforschung Austria)

## Technical details

Shelf life	2 years
Storage	Cool and dry
Application temperature	from 0 °C
Resistance to temperature	-25 °C to +75 °C
Outdoor weathering period	3 months
Resistance to ageing	>20 years

**Area of application:** Nail seals for roofs and formwork strips Prevent the ingress of humidity through screw or nail holes.

# 10

Jahre Garantie  
Ans Garantie  
Anni Garanzia  
Years Warranty

Security is part of the system at Ampack. We not only cover the cost of the materials, but also the installation and removal costs.


✓ **HFA-tested**

Leak detection tests of Holzforschung Austria

 **ISO 9001:2008**  
Swiss Research

## Delivery forms

Item no.	Identification	Roll size	Box contents	Pallet contents
7640115530110	Ampacoll® ND 60	60 mm × 40 mm × 5 mm	5 rolls = 500 items	30 boxes
7640115536228	Ampacoll® ND 80	80 mm × 60 mm × 5 mm	4 rolls = 300 items	18 boxes

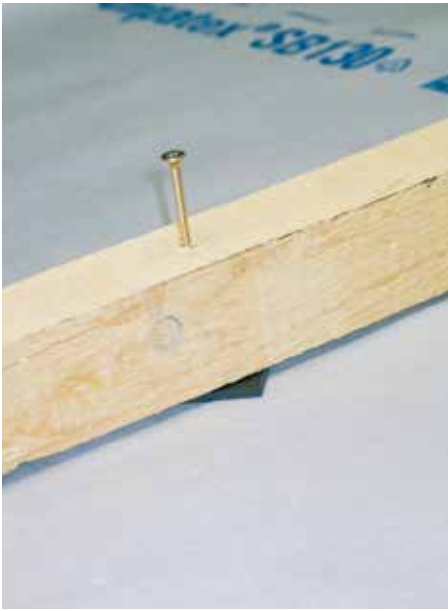

### Other nail sealing products



**Ampacoll® ND.Band 60**  
Nail seals, 60 mm wide

external



**Ampacoll® ND.Band 80**  
Nail seals, 80 mm wide

external



**Ampacoll® ND Duo:**  
Nail sealing tape adhesive on both sides

external

### Applications tips

#### The protective function of a nail seal

What good is the best roof membrane when water can penetrate the screw or nail holes? **Ampacoll® ND.Band** nail sealing tape is your guarantee for water-tight roof membranes. Twisted counter battens, shrinking wood, extreme alternating cycles of wet and dry, low contact pressure, poor adhesion of the nail in the rafters, mechanical loading from scaffolding or tile trestles, permanent snow coverings – these are all potential sources of damage!

#### Tips when laying

Make a chalkline for every counter batten and stick the **Ampacoll® ND** directly onto the roof membrane. For wide roof lathing **Ampacoll® ND.Band 80**. Then mount the counter battens. The nail sealing tape can often replace the chalkline.

#### Ampack recommends

Counter battens are extremely susceptible to the extremes of wet and dry. Therefore, for better insulation, a nail seal is preferred to screwing the counter battens.



Please observe the recommendations for use and further system products in our adhesives matrix




Further information and detailed documentation at [www.ampack.eu](http://www.ampack.eu)



Questions on application techniques  
Tel.: +41 (0)71 858 38 00  
Fax +41 (0)71 858 38 37

Sales via specialist dealers



The following information could have been superseded by new findings or developments. Current Information can be found at [www.ampack.eu](http://www.ampack.eu). © Ampack AG, Rorschach, 10.2016

**www.ampack.eu**  
Ampack Switzerland: 071 858 38 00  
Ampack Austria: 05523 53433  
Ampack Germany: 07621 1610264  
Ampack France: 04 50 83 70 54  
Ampack Italy: 0471 053 475

