Ampacoll® Reflecto Tape

Aluminium vapour deposited PE adhesive tape





- > Weather and age-resistant
- > Easy to tear off by hand
- > Easy to use
- > Very high adhesive strength
- > Extremely robust and durable
- > Serrated easy to tear off by hand

Technical details	Value	
Support system	PE/PET membrane, metallised (29µ)	
Pressure sensitive adhesive	Dispersion acrylate	
Storage	UV-protected, cool and dry (at max. +23 °C)	
Application temperature	0°C to +40°C (with clean and dry substrate)	
Temperature resistance	-30°C to +80°C	
Resistance to ageing	>20 years	
Natural weathering period	2 months	






Area of application: Metallised PE/PET adhesive tape for internal and external use It functions as a reliable diffusion barrier, as well as interface bonding on aluminium-clad insulation systems.

Available as				
Item no.	Identification	Roll size	Box contents	
7640115537874	Ampacoll® Reflecto Tape	50 m × 60 mm	10 rolls = 500 metres	

Suitable for use on:



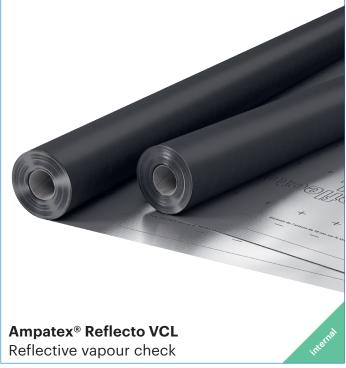

Application tips

Surfaces must be clean, dry and free of dust, ice and grease prior to adhesion. The ambient temperature, the surface temperature and the temperature of the adhesive tape must correspond to the specified working temperature. Installed membranes should be tension-free and even. The adhesive tape must be applied tension-free following the uneven surface of the substrate and pressed down firmly.

Ampacoll® Reflecto Tape adheres immediately to the substrate. Mechanical loads caused by objects being dragged around, intensive walking or similar must be avoided.



Please observe the recommendations for use and further system products in our adhesives matrix



Further information and detailed documentation at www.ampack.biz

Sales via specialist dealers

Ampack Switzerland: 071 858 38 00 Ampack Austria: 05523 53433 Ampack Germany: 07621 1610264 Ampack France: 04 50 83 70 54 Ampack Italy: 0471 053 475

www.ampack.biz

