Ampacoll® UV flexx

UV-stable, expandable adhesive tape





> UV-stable

- > Optimum crosswise expandability
- > Moisture resistant, for outdoor
- > Soft and adaptable, absorbs component movements
- > Completely black, no imprint


Technical details	Value
Storage	cool and dry
Working temperature	from –5 °C
Temperature resistance	– 40 to + 100 °C
Ageing resistance	>20 years
Natural weathering period	3 months (prior installation of façade surfacing)
UV stability	>10 years



Area of application: UV-stable, tear-resistant but at the same time expandable adhesive tape. Ideal for windtight bonding of Ampatop® F black, Ampatop® RF black and Tyvek® UV facade.

Forms of delivery			
Article number	Description	Roll dimensions	Box contents
7640442091339	Ampacoll® UV flexx	40 m × 60 mm	10 rolls = 400 m
7640442091360	Ampacoll® UV flexx 20/40	40 m × 60 mm Liner division: 20 mm, 40 mm	10 rolls = 400 m

Application photos

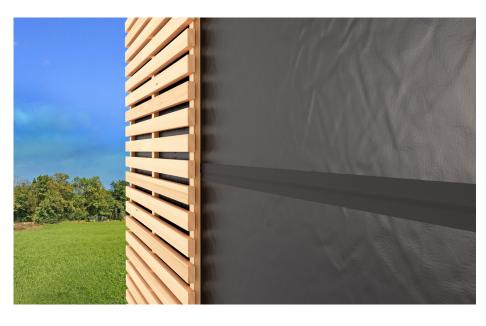



Tips for laying

The surfaces to be bonded must be clean, dry and free of dust and grease. The ambient temperature, the surface temperature and the temperature of the adhesive tape must correspond to the indicated processing temperature. Installed membranes should be stress-free and even. The adhesive tape must be applied stress-free following the uneven surface of the substrate and pressed on firmly. Ampacoll® UV flexx adheres immediately to the substrate and is largely insensitive to normal weather conditions for three months. Mechanical loads caused by objects being dragged around, intensive walking or similar must be avoided.



Note the application guidelines and other system products in our adhesive matrix



For more detailed information and documents see www.ampack.biz

Sales through dealers

Ampack Switzerland: +41 71 858 38 00 Ampack Austria: +43 5523 53433 Ampack Germany: +49 7621 1610264 Ampack France: +33 4 50 83 70 54 Ampack Italy: +39 471 053 475

www.ampack.biz



This data may become invalid as a result of new information or development. Current information can be found at www.ampack.biz © Ampack AG, Rorschach, 05.2022