


Ampacoll® XT

Acrylic adhesive tape for indoor and outdoor use

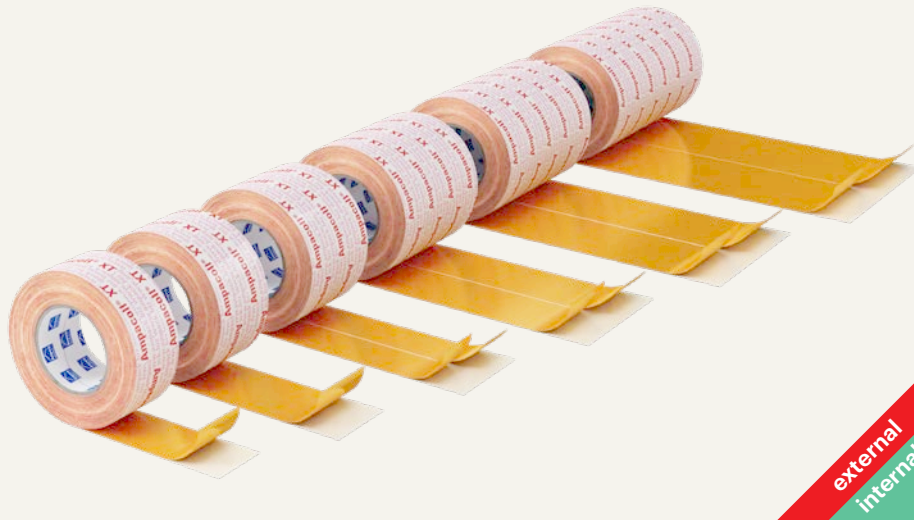

- > Diffusion-permeable carriers
- > Keeps its shape thanks to tear-resistant carrier
- > Maximum adhesive power at temperatures from as low as -5°C
- > Extremely robust and durable
- > Tyvek®-carrier is watertight and will not rot

| Technical details | Value | Standard |
|---------------------------|--------------------------------------|----------|
| Storage | Cool and dry | |
| Application temperature | from -5°C | |
| Temperature resistance | -40 to $+100^{\circ}\text{C}$ | |
| Resistance to ageing | >20 years | |
| Natural weathering period | 4 months (without mechanical stress) | |



Area of application: Tear-resistant system adhesive tape for indoor and outdoor use. Depending on the width, the adhesive band is ideal for wind and airtight adhesion of board joints, overlaps, end winding and right-angle connections, component joints, injection holes, repair sites, thresholds and for adhesion to ridges, hips and grooves.

| Delivery forms | | | |
|----------------|------------------------------|--------------------------------|-----------------------|
| Item no. | Identification | Roll size | Box contents |
| 7640115531728 | Ampacoll® XT 60 | 25m×60mm×0.3mm | 10 rolls = 250 metres |
| 7640115531759 | Ampacoll® XT 75 | 25m×75mm×0.3mm | 6 rolls = 150 metres |
| 7640442091025 | Ampacoll® XT 100 single-slit | 25m×100mm×0.3mm Slit: 50mm | 6 rolls = 150 metres |
| 7640115531810 | Ampacoll® XT 150 single-slit | 25m×150mm×0.3mm Slit: 75mm | 4 rolls = 100 metres |
| 7640115535245 | Ampacoll® XT 200 single-slit | 25m×200mm×0.3mm Slit: 100mm | 2 rolls = 50 metres |
| 7640115535948 | Ampacoll® XT 250 single-slit | 25m×250mm×0.3mm Slit: 125mm | 2 rolls = 50 metres |

Application photos



Application tips

Surfaces must be clean, dry and free of dust, ice and grease prior to adhesion. **Ampacoll® XT** is ideally suited for airtight and windproof adhesion of overlaps and board joints, formasking end winding and right-angle connections in wood-based boards, for bridging larger and smaller components, masking boards on ridges, hips and grooves, and for masking injection holes, thresholds and repair sites.

Ampacoll® XT adheres immediately to the surface it is intended for. It can largely withstand normal weather conditions for four months. Please ensure that once they have been masked with the tape, the joints are not damaged mechanically (e.g. by objects being dragged across them).



Please observe the recommendations for use and further system products in our adhesives matrix



Further information and detailed documentation at www.ampack.biz

Sales via specialist dealers

Ampack Switzerland: 071 858 38 00
Ampack Austria: 05523 53433
Ampack Germany: 07621 1610264
Ampack France: 04 50 83 70 54
Ampack Italy: 0471 053 475

www.ampack.biz



The following information may have been superseded by new findings or developments. Current information can be found at www.ampack.biz. © Ampack AG, Rorschach, 05.2018

5001EU/D25.00HW(VS)0418