

Ampatex[®] Reflecto VCL

Vapour check



- > Reflective foiled membrane increases thermal performance of structure
- > Air-tight seal and vapour check membrane
- > Cutting and orientation aid

Technical details		Value
s _d value		80m
Weight		140g / m ²
Fire behaviour E		E
Outdoor weathering		to cover immediately
Tear resistance	longitudinal transverse	340N / 5cm 300N / 5cm
Resistance to further tearing (nail shaft)	longitudinal transverse	150N 150N
Temperature resistance		- 40 to + 80 °C
Emissivity value		≤ 0.04




 **ISO 9001**
Swiss Research

Area of application: Triple layer reflective vapour control layer.

Forms of delivery			
Article number	Description	Roll dimensions	Content of pallets
7640115537720	Ampatex [®] Reflecto VCL	2,7m × 100m = 270m ²	12 rolls = 3240m ²
7640115537706	Ampatex [®] Reflecto VCL	3,0m × 100m = 300m ²	12 rolls = 3600m ²

Our Reflecto system:

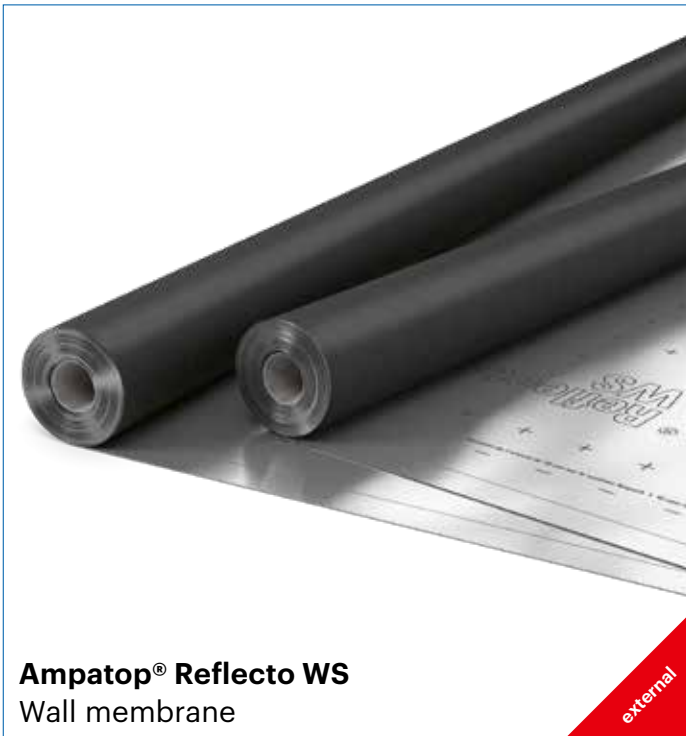

Please observe the recommendations for use and further system products in our adhesives matrix



Further information and detailed documentation at www.ampack.biz

Sales via specialist dealers

Ampack Switzerland: +41 (0)71 858 38 00
Ampack Austria: +43 (0)5523 53433
Ampack Germany: +49 (0)7621 1610264
Ampack France: +33 (0)4 50 83 70 54
Ampack Italy: +39 (0)471 053 475

www.ampack.biz



The following information may have been superseded by new findings or developments.
Current information can be found at www.ampack.biz. © Ampack AG, Rorschach, 07.2021

4130EU/EX.YY(VS)0721