

# Ampatop® Reflecto WS

Wall membrane



- > Reflective foiled membrane increases thermal performance of structure
- > Breathable vapour open wall membrane
- > Cutting and orientation aid
- > Breathable membrane reducing the risk of condensation

Technical details		Value
s <sub>d</sub> value		0,11 m
Resistance to water penetration		W2
Weight		140g / m <sup>2</sup>
Fire behaviour		E
Outdoor weathering		3 months
Tear resistance	longitudinal transverse	260 N / 5 cm 200 N / 5 cm
Resistance to further tearing (nail shaft)	longitudinal transverse	150 N 150 N
Temperature resistance		-40 to +80 °C
Emissivity value		≤ 0.04



13859-2




ISO 9001  
Swiss Research

**Area of application:** Triple layer reflective external breathable wall membrane.

Forms of delivery			
Article number	Description	Roll dimensions	Content of pallets
7640115537683	Ampatop® Reflecto WS	2,7 m × 100 m = 270 m <sup>2</sup>	12 rolls = 3240 m <sup>2</sup>
7640115537669	Ampatop® Reflecto WS	3,0 m × 100 m = 300 m <sup>2</sup>	12 rolls = 3600 m <sup>2</sup>

Our Reflecto system:

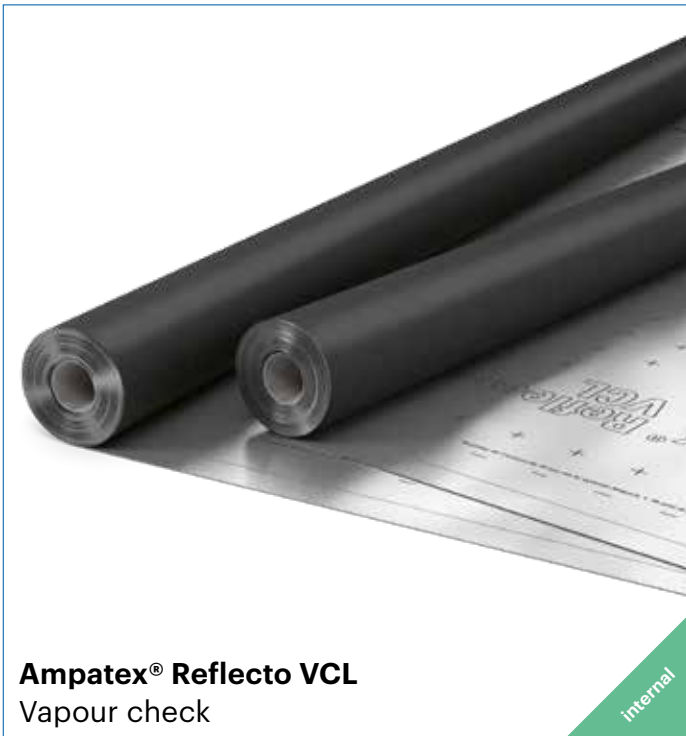

Please observe the recommendations for use and further system products in our adhesives matrix



Further information and detailed documentation at [www.ampack.biz](http://www.ampack.biz)

Sales via specialist dealers

Ampack Switzerland: +41 (0)71 858 38 00  
Ampack Austria: +43 (0)5523 53433  
Ampack Germany: +49 (0)7621 1610264  
Ampack France: +33 (0)4 50 83 70 54  
Ampack Italy: +39 (0)471 053 475

[www.ampack.biz](http://www.ampack.biz)



The following information may have been superseded by new findings or developments.  
Current information can be found at [www.ampack.biz](http://www.ampack.biz). © Ampack AG, Rorschach, 07.2021

3009EU/EX.YY(VS)0721