


# Ampatop® SealEdge GHS

Eaves membrane

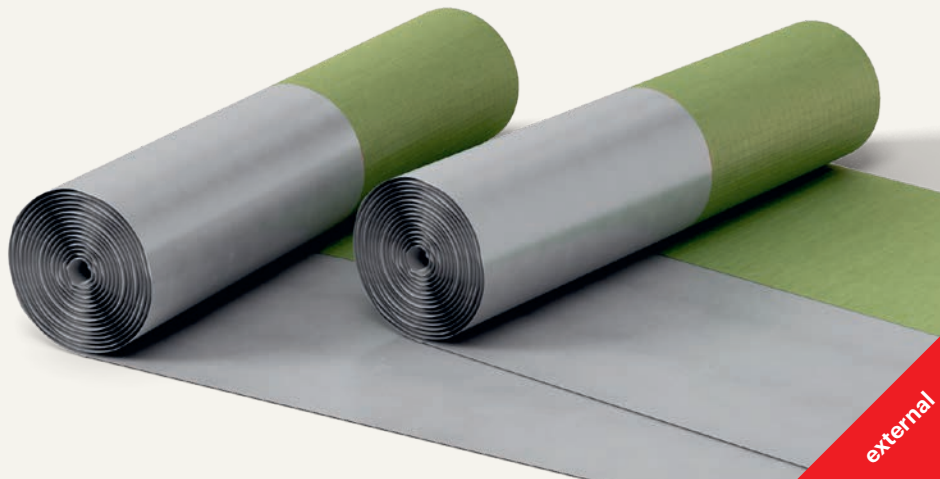

- > Prefabricated combination of **Ampatop® Seal GHS** and a highquality UV-resistant PVC strip
- > Can be solvent welded or hot welded
- > Quality seal of the association «Gebäudehülle Schweiz»

Technical details		Value	
Weight	Ampatop® Seal GHS	350 g/m <sup>2</sup>	
	PVC strip	650 g/m <sup>2</sup>	
Width	Ampatop® Seal GHS	300 mm	
	PVC strip	300 mm	
Tear resistance	Ampatop® Seal GHS	lengthwise	350
		crosswise	380 N/5 cm
	PVC strip	lengthwise	2800
		crosswise	2500 N/5 cm
Welding temperature	Ampatop® Seal GHS	240–280°C	
	PVC strip	280°C	
UV stability	Ampatop® Seal GHS	6 months	
	PVC strip	>10 years	
Abrasion resistance	Ampatop® Seal GHS	passed (GHS)	
Hail resistance	Ampatop® Seal GHS	HW4	
		passed (GHS)	

\*Conditions for the twenty-year premium warranty include registering the building object and the Ampack products used. In addition, our products must be used as part of a system. For further details, please see our General Warranty Conditions.

**Area of application:** Ampatop® SealEdge GHS is a prefabricated eaves membrane with a UV-resistant PVC strip welded to an Ampatop® Seal GHS roof membrane. The product is used to seal open eaves with perforated metal to drain water from the roof membrane into the gutters.



 **ISO 9001**  
Swiss Research



Quality seal of the association  
«Gebäudehülle Schweiz»

## Delivery forms

Item no.	Identification	Roll size
7640442090752	Ampatop® SealEdge GHS	600 mm×30 m



Please follow the recommendations for use and consider other system products in our adhesives matrix.



Further information and detailed documentation at [www.ampack.biz](http://www.ampack.biz)

Sales via specialist dealers

Ampack Switzerland: +41 (0)71 858 38 00  
Ampack Austria: +43 (0)5523 53433  
Ampack Germany: +49 (0)7621 1610264  
Ampack France: +33 (0)4 50 83 70 54  
Ampack Italy: +39 (0)471 053 475

[www.ampack.biz](http://www.ampack.biz)



The following information may have been superseded by new findings or developments. Current information can be found at [www.ampack.biz](http://www.ampack.biz). © Ampack AG, Rorschach, 02.2021

2257EU/EX.YY(VS)0221